






BLADE 3/3X TRANSMITTER SETUP GUIDE

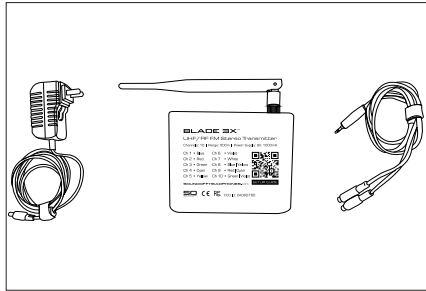


1. Unpack your Blade 3/3X transmitter.

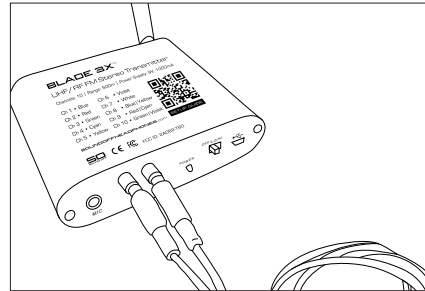


2. Plug the RCA cable into the transmitter.

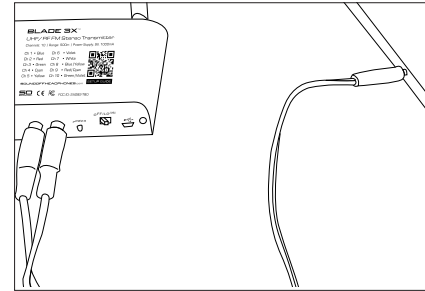


3. Plug the other end of the RCA cable into your music source, iPod, laptop, phone, or mixer.

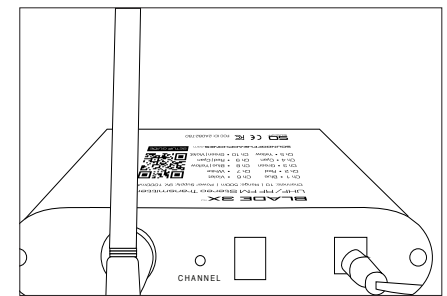


4. Plug one end of the power cable into the transmitter and the other into your power source.

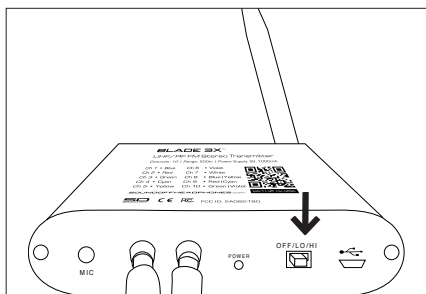


5. Turn on the transmitter using the power switch. In most environments, use HI to transmit across the maximum range. In some environments, LO can result in improved clarity.

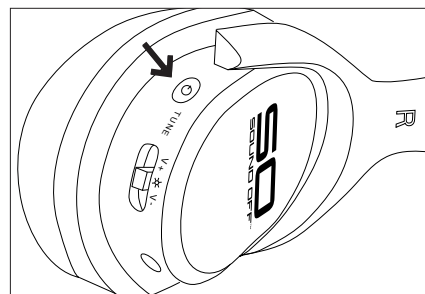

6. Turn on your GLO 3/3X headphone by pressing the power button on the bottom, of the right ear.

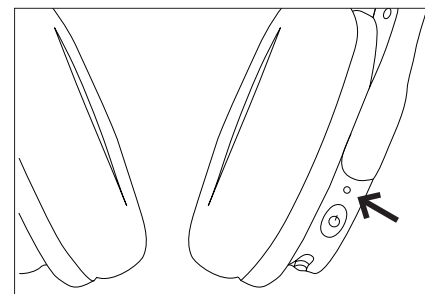

7. A blue status light indicates that the headphone is in scan mode (click the power button to scan for the next active channel). A green status light indicates that the headphone is in manual mode (click the power button to step through the channels one by one). To switch between the two modes, turn the headphone **off** and then press the power button for five seconds..

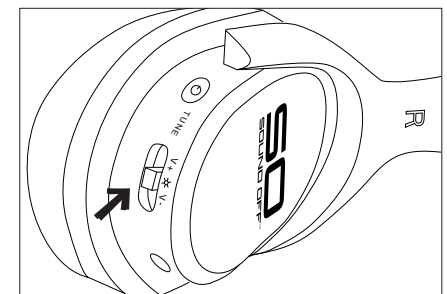

8. Control the headphone volume by moving the volume control slider **from side to side**. To disable or enable the LED, press the volume control slider **in** for five seconds.